


# Fouts Bros Fire Equipment

== ADMINISTRATIVE - TANKER - 7.250 03/07/23 ==

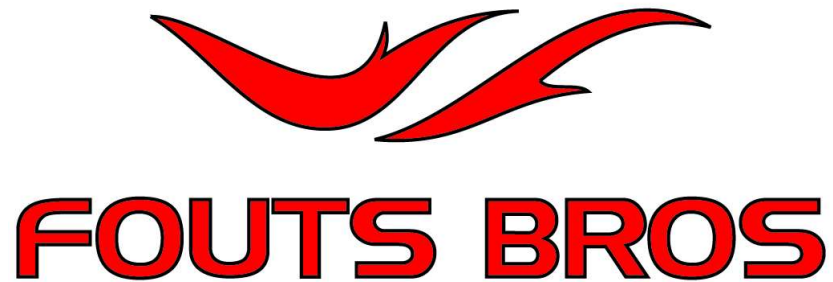

## SUPER TANKER

Fouts  
138 Roberson Mill Road  
Milledgeville, GA 31061  
1-844-304-0010

# Fouts Bros Fire Equipment

## **SCOPE AND GENERAL REQUIREMENTS**

It is the intent of the manufacturer to provide a new fire apparatus that will withstand the continuous use encountered in the emergency fire fighting service. The apparatus shall be of the latest type, symmetrically proportioned and constructed with due consideration of the load to be sustained.

All parts not specifically mentioned herein, but which are necessary in order to furnish a complete fire apparatus, shall be furnished and shall conform to the best practices known to the fire apparatus industry.

The unit is to be of current year manufacture, and is to be new and unused. The bid price shall not include any local, State, or Federal taxes. The Bidder shall not be liable for any State or Federally mandated tax or program after the sale of this apparatus.

These specifications shall be construed as minimum. Should the manufacturer's current published data or specifications exceed these, they shall be considered minimum and be furnished.

## **PRIME BIDDER, MANUFACTURER**

The manufacturer shall be prime bidder and shall identify the location of their facility.

## **BIDDERS BACKGROUND**

Bids are requested from responsible manufacturers who are engaged in the manufacture of fire apparatus. To insure reliable and complete acceptance of the apparatus, bidder shall have been in operation for a minimum of thirty (30) years in the manufacturing of fire apparatus.

The manufacturer of the apparatus must be fully owned and managed by a Parent Company, Corporation, or Individual(s) that is 100% held by United States of America based Company, Corporation, or United States citizen(s).

Proposals from any manufacturer that is fully or partially owned and/or operated by a foreign company, Corporation or Individual(s) under any type of ownership, partnership, or any similar type of agreement will be immediately rejected.

If the manufacturer of the apparatus, or if any owner, shareholder, or immediate relative of an owner or shareholder that has previously been involved in or held ownership in any company that has filed bankruptcy or any other type of reorganization plan, it must be clearly stated in the bid proposal. The statement must include details and dates of all occurrences.

## **FAMA COMPLIANCE**

# Fouts Bros Fire Equipment

The apparatus manufacturer must be a current member of the Fire Apparatus Manufacturer's Association (FAMA) and must provide certificate of membership.

## **FAIR, ETHICAL AND LEGAL COMPETITION**

In order to ensure fair, ethical, and legal competition the apparatus manufacturer shall have ever been fined or convicted of price fixing, bid rigging, or collusion in any domestic or international fire apparatus market.

## **PROPRIETARY PARTS**

It is the intention of the purchaser for all bidders to furnish the apparatus with major parts commonly used by the heavy-duty truck manufacturers and open market vendors whereas replacement parts are more readily available and at reduced cost. The use of proprietary parts may not be acceptable to the purchaser.

## **MANUFACTURER'S DISCRETION**

Materials, parts, or procedures used are subject to change at manufacturer's discretion at any time to provide equal or better products.

## **PRODUCT QUALITY AND WORKMANSHIP**

The components provided and workmanship performed shall be of the highest quality available for this application. Special consideration shall be given to the following areas:

- A). Accessibility to various components that require periodic maintenance or lubrication checks.
- B). Ease of vehicle and pump operation.
- C). Features beneficial to the intended operation of the apparatus.

Construction of the complete apparatus shall be designed to carry the loads intended to meet the road and terrain conditions and speed requirements desired when specified by the purchaser.

Welding shall not be employed in the assembly of the apparatus in a manner that will prevent the removal of any major component part for service and/or repair.

## **INSURANCE REQUIREMENTS**

Each bidder must submit with their bid proposal a Certificate of Insurance listing the proposed manufacturer's product liability insurance coverage. Liability insurance shall be a minimum amount of ten (10) million dollars. Submitted certificate shall name the apparatus manufacturer, insurance

# Fouts Bros Fire Equipment

company, policy number, and effective dates of the insurance policy. Bids submitted without the required certificate will be considered nonresponsive and automatically rejected. No exceptions are allowed to the minimum insurance coverage requirement.

The manufacturer shall maintain full insurance coverage on the purchaser's cab and chassis from time of first possession by the manufacturer until the apparatus is delivered and accepted by the purchaser (No Exceptions). Purchaser reserves the right to require proof of insurance from the manufacturer's insurance carrier prior to entering into a contract for the apparatus.

## **PAYMENT TERMS**

Full payment for the apparatus shall be made at time of delivery of the completed vehicle. Due to insurance liability, the apparatus will not be left at the purchaser's location without full acceptance and payment or prior agreement between the Purchaser and Bidder.

Final delivery price shall not include any Local, State or Federal taxes. The manufacturer shall not be liable for any State or Federal mandated tax or program after sale or delivery of the apparatus.

## **VEHICLE ACCEPTANCE AND DELIVERY**

The customer shall pickup the vehicle at the manufacturing facility and shall supply evidence of sufficient insurance coverage to transport the vehicle.

## **FUEL TANK FILLED AT DELIVERY**

The fuel tank and DEF tank (if applicable) shall be filled upon final delivery at the factory.  
== DIMENSIONS - SUPER TANKER, TANDEM AXLE - 7.250 03/07/23 ==

## **OVERALL HEIGHT**

An overall height restriction has not been specified for this apparatus.

## **OVERALL LENGTH**

No overall length restriction has been specified for this apparatus.

## **OVERALL WIDTH**

No overall width restriction has been specified for this apparatus.

## **OVERALL WHEELBASE**

No overall wheelbase restriction has been specified for this apparatus.

# Fouts Bros Fire Equipment

## **PUMP MODULE WIDTH**

No pump module width restriction has been specified for this apparatus.

## **ANGLE OF APPROACH**

No angle of approach restriction has been specified for this apparatus.

## **ANGLE OF DEPARTURE**

No angle of departure restriction has been specified for this apparatus.

== NFPA 1901 REQUIREMENTS - TANKER - 7.250 03/07/23 ==

## **NFPA COMPLIANCE**

The National Fire Protection Association standard #1901 (most recent edition) is hereby adopted and made a part of these specifications, the same as if they were written out in full detail, insofar as they apply with the exception of any sections dealing with "Equipment Recommended for Various Types of Apparatus". Bidders are to provide only the equipment requested herein and the Department will supply the rest before the apparatus is put into service. The unit shall comply with all federal, state, ICC, and DOT motor vehicle regulations, standards, and laws relating to commercial vehicles as well as to fire apparatus on the date of the bid.

## **ROAD TEST CERTIFICATION**

A road test shall be conducted with the finished apparatus fully loaded. During this time, the apparatus shall not show loss of power and/or overheating. The transmission driveshaft or shafts and rear axle shall run free from abnormal vibration or noise throughout the operating range of the apparatus. The apparatus, when loaded, shall have not less than 25% or more than 45% of the weight on the front axle and not less than 55% or more than 75% on the rear axle.

- A). The apparatus must be capable of accelerating to 35 mph from a standing start within 25 seconds on a level concrete highway without exceeding the maximum governed RPM of the engine.
- B). The apparatus must be capable of accelerating from a steady speed of 15 mph to a true speed of 35 mph within 30 seconds. This shall be accomplished without moving the gear selector.
- C). The fully loaded apparatus shall be capable of obtaining a speed of 50 to 55 mph on a level concrete highway.
- D). The manufacturer shall furnish copies of the engine installation approvals signed by the appropriate engine company upon delivery of the chassis to the Fire Department.

# Fouts Bros Fire Equipment

- E). The manufacturer shall furnish copies of the transmission approval signed by the transmission manufacturer upon delivery of the chassis to the Fire Department.
- F). The manufacturer shall furnish copies of the front and rear axle approvals upon delivery of the apparatus to the Fire Department.

## **ROAD TEST FAILURE**

In the event the apparatus fails to meet the test requirements of these specifications on the first trials, second trials may be made at the option of the manufacturer within thirty (30) days of the first trials. Such trials shall be final and conclusive and failure to comply with changes, as the purchaser may consider necessary to conform to any clause of the specifications within thirty (30) days after notice is given to the manufacturer of such changes, shall be cause for rejection of the apparatus. Permission to keep or store the apparatus in any building owned or occupied by the purchaser, or its use by the purchaser during the above-specified period with permission of the manufacturer, shall not constitute acceptance.

## **VEHICLE TOP SPEED**

The rear axle shall be geared for a top speed of 60 mph at engine governed RPM.

## **NFPA TOP SPEED STATEMENT**

NFPA-1901, 2009 Edition - 4.15.2. The maximum top speed of fire apparatus with a GVWR over 26,000 lbs. shall not exceed either 68 MPH or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

NFPA-1901, 2009 Edition - 4.15.3. If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gallons, or the GVWR of the vehicle is over 50,000 lbs., the maximum top speed of the apparatus shall not exceed either 60 MPH or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

## **SAFETY SIGNS**

The following safety signs shall be provided:

### **SEATED AND BELTED WARNING LABEL - FAMA# 07**

A permanent label shall be provided that is visible to all occupants that states that they should be seated and belted while the apparatus is in motion. The label shall also state potential injuries or death that could be caused if the safety belts are not used properly.

### **CAB INTERIOR EQUIPMENT MOUNTING DANGER LABEL - FAMA# 10**

# Fouts Bros Fire Equipment

A permanent label shall be provided inside of the cab warning of the dangers of unsecured equipment inside the cab. The label shall state that all equipment shall be properly secured and also warn of potential injury or death that could be caused by failing to do so.

## **DO NOT WEAR HELMET LABEL - FAMA# 15**

A permanent label shall be provided inside of the cab in view of all seated positions stating that helmets should not be worn in cab. The label shall also warn of potential injury or death that could be caused by wearing helmet in cab.

## **VEHICLE BACKING LABEL - FAMA17**

A permanent label shall be provided inside of the cab in view of the driver advising of proper procedures to following when the apparatus is in reverse motion. The label shall also warn of potential injury or death that be caused by failing to follow proper procedures.

- “Do Not Move Apparatus When Light Is On” sign adjacent to the warning light indicating a hazard if the apparatus is moved (as described in subsequent section).

## **CHASSIS DATA LABELS**

The following information shall be on labels affixed to the vehicle:

### Fluid Data:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid
- Pump primer fluid (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant
- Air conditioning lubrication
- Power steering fluid
- Cab tilt mechanism fluid (if applicable)
- Transfer case fluid
- Equipment rack fluid (if applicable)
- Air compressor system lubricant
- Generator system lubricant (if applicable)

### Chassis Data:

# Fouts Bros Fire Equipment

- Chassis Manufacturer
- Production Number
- Year Built
- Month Manufactured
- Vehicle Identification Number

Location shall be in the driver's compartment of the chassis cab.

## **OVERALL HEIGHT, LENGTH, GVW DATA PLAQUE**

A "high visibility" plate shall be permanently mounted in the cab, visible to driver when seated.

The plate shall show the overall height of the completed apparatus in feet and inches, the overall length of the completed apparatus in feet and inches.

The plate shall also show the gross vehicle weight rating (GVWR) in tons.

Text shall also be supplied on the plate, indicating that the information shown is current upon completion of the apparatus. If the overall height of the apparatus changes after the apparatus is put into service, then the purchaser must revise the dimensions on the plate.

## **"NO RIDE" LABEL**

A label shall be located on the vehicle at the rear step areas, and at any cross walkways, if they exist. The label(s) shall warn personnel that riding in or on these areas while the vehicle is in motion is prohibited.

## **FAMA SAFETY GUIDE**

One (1) copy of the latest edition of FAMA's Fire Apparatus Safety Guide shall be provided with the completed apparatus.

== CHASSIS, COMMERCIAL - TANDEM AXLE - 7.250 03/07/23 ==

## **COMMERCIAL CHASSIS SPECIFICATION**

### **CHASSIS PROVIDER**

The chassis, as detailed in these specifications, shall be ordered and supplied by the apparatus manufacturer.

### **KENWORTH CHASSIS**

A Kenworth 2-door chassis per the attached specifications shall be furnished:



# Fouts Bros Fire Equipment

## **CHASSIS PAINT COLOR**

The cab shall be painted a single color.

**Color:** Fouts Bros. Red

**Paint Number:** 763572EA

## **AIR HORNS**

Two (2) Hadley chrome plated air horns shall be installed at the front of the vehicle. The air horns shall be mounted in full compliance of NFPA. The supply lines shall be dual 1/4" lines with equal distance from each horn.

Each air horn shall be mounted, one (1) each side, on the side of the hood.

Both air horns shall be controlled by a chassis manufacturer supplied lanyard.

## **ELECTRIC TRAFFIC HORN AND AIR HORN SELECTOR SWITCH**

One (1) selector switch shall be provided on the cab's dash that will allow the chassis steering wheel horn button to activate either the electric horn or air horn system. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

== CHASSIS MODS, TANKER, TNDM AXLE - 7.250 03/07/23 ==

## **CHASSIS MODIFICATIONS**

The following modifications and installations shall be performed on the chassis upon delivery to the apparatus manufacturer:

### **TIRE PRESSURE MONITORING DEVICE**

Each tire installed on the apparatus shall be equipped with a tire pressure monitoring device. The device shall consist of a valve stem cap to with an LED tire alert to indicate tire pressure conditions. The LED will flash when the tire drops 5-10 psi below the factory setting.

### **HUB COVERS (front)**

Chrome hub covers shall be provided on the front axle.

### **HUB COVERS (rear)**

A pair of chrome high hat hub covers shall be provided on each of the rear axle hubs.

# Fouts Bros Fire Equipment

## **COVERS, LUG NUT, CHROME**

Chrome lug nut covers shall be supplied on front and rear wheels.

## **EXHAUST SYSTEM**

The chassis exhaust system shall be provided as detailed in the chassis specifications. NO modifications shall be made by the apparatus manufacturer.

## **HOT EXHAUST DANGERS LABEL - FAMA# 04**

A permanent label shall be provided near any hot exhaust surface that warns of potential injury or death that could be caused by contact with the surface. The label shall also state precautions that should be taken while working on or around the surface.

## **BUMPER**

The front bumper shall be provided as detailed in the chassis specifications.

## **CHASSIS PREPARATION**

Prior to installation of the fire pump, apparatus body, or cab steps, all components which extend out beyond the chassis frame rails shall be removed and relocated to the area within the frame rails

## **CHASSIS TOW HOOKS**

The front tow hooks shall be provided as detailed in the chassis specifications.

## **REAR TOW PLATES**

Two (2) rear tow plates with 1.50" I.D. holes, constructed with 1.00" steel plate shall be provided at the rear of the apparatus body.

## **REAR MUD FLAPS**

A pair of black rubber mud flaps, with the Manufacturer's logo, shall be provided and installed behind the rear wheels.

## **VEHICLE DATA RECORDER**

The apparatus shall be equipped with an Innovative Controls "Vehicle Data Recorder and Seat Belt Warning System" (VDR/SBW) that is connected to the power train CAN (Controller Area Network) bus consisting of transmission (TCM), engine control (ECM) and antilock brake (ABS) modules mounted on the apparatus. The VDR/SBW will function per NFPA 1901-2016 sections 4.11 (Vehicle

# Fouts Bros Fire Equipment

Data Recorder) utilizing the power train's J1939 data and 14.1.3.10 (Seat Belt Warning) using the "Seat Belt Input Module" for seat occupied and belt status information.

## **SEAT BELT WARNING SYSTEM**

There shall be a seat belt indicator system supplied in the cab. The indicator system shall indicate seat belt use for each individual seating position when the seat is occupied, the seat belt remains unfastened and the parking brake is released.

## **CENTER CONSOLE**

A center console shall be furnished and shall be located between the driver and officer's seats. The top face of the console shall be designed as the switch panel for all emergency light switches.

The sides of the console shall be powdercoated black in color.

## **BATTERY SYSTEM**

The battery system shall be supplied with the chassis.

## **BATTERY JUMPER STUDS**

External battery jumper studs shall be provided as detailed in the chassis specifications.

## **KEYLESS IGNITION SWITCH**

One (1) non-removable, keyless style ignition switch shall be provided with the chassis.

## **MASTER BATTERY SWITCH**

A master battery switch shall be provided as detailed in the chassis specifications.

## **BATTERY CONDITIONER**

A Kussmaul Chief 6012 Series battery conditioner shall be supplied. The battery conditioner shall provide a 60 amp output for the chassis batteries and a 20 amp output circuit for accessory loads.

## **BATTERY CHARGER LOCATION**

The battery charger shall be located in a pre-determined location by the manufacturer.

## **120 VOLT SHORELINE CONNECTION - "SUPER" AUTO EJECT**

# Fouts Bros Fire Equipment

One (1) Kussmaul "Super" Auto Eject model 091-55-20-120, automatic, 120 volt, 20 amp shoreline disconnect shall be provided for the on board, 120 volt battery charging systems.

## **AUTO-EJECT MATING PLUG**

A 5-20P, 20 amp mating female cord end shall be shipped loose with the apparatus to allow the Fire Department to connect cord end to a Fire Department provided charging cord.

## **BATTERY CHARGER DISPLAY/ COVER**

One (1) Kussmaul model 091-55-266-YW batter charger status center/ auto eject cover shall be supplied with the charger.

The cover shall be yellow in color.

## **SHORELINE RECEPTACLE LOCATION**

The shoreline receptacle shall be located on the left hand side of the apparatus in a pre-determined location by the manufacturer.

## **AUXILIARY AIR COMPRESSOR**

A Kussmaul 12V air compressor shall be supplied. The compressor system shall be designed to maintain the air pressure in the air system while not in use. A pressure switch shall sense air pressure drop and engage the compressor which shall run until the pressure is restored.

## **AUXILIARY AIR COMPRESSOR LOCATION**

The auxiliary air compressor shall be located in a pre-determined location by the manufacturer.

## **BACK-UP ALARM**

One (1) 97 DB back up alarm shall be provided and installed at the rear of the unit. It shall be wired to activate when the transmission is placed in reverse.

== PUMP & PLUMBING - TANKER - 7.250 03/07/23 ==

## **PUMP, MODULE, AND RELATED ITEMS**

### **NFPA 1901 COMPLIANT PUMP**

The fire pump and related plumbing on the specified apparatus shall be installed in accordance with applicable NFPA 1901 guidelines at the time the contract was placed.

### **HALE MBP POWER TAKE-OFF (PTO) PUMP**

# Fouts Bros Fire Equipment

## **PUMP ASSEMBLY**

1. The pump shall be of a size and design to mount on the chassis rails of commercial and custom truck chassis.
2. The entire pump shall be manufactured, and dynamometer tested at the pump manufacturer's factory. The pump manufacturer must have ISO 9001 quality control certification.
3. The pump shall be driven by the truck chassis engine through a transmission mounted or split drive line power take-off (PTO). The engine and PTO shall provide sufficient horsepower and RPM to enable the pump to meet and exceed the specified performance within the torque rating of the PTO, truck transmission gears and drive line components.
4. The entire pump, both suction and discharge passages, shall be hydrostatically tested to a pressure of 600 PSI. The pump shall be fully tested at the pump manufacturer's factory to the performance spots as outlined by the latest NFPA 1901 Standard. Pump shall be free from objectionable pulsation and vibration.
5. The pump body and related parts shall be ductile iron alloy, with a minimum tensile strength of 60,000 PSI. All moving parts in contact with water shall be of high quality bronze or stainless steel. Pumps utilizing castings made of lower tensile strength cast iron not acceptable.
6. Pump body shall be vertically split, on a single plane, for easy removal of impeller, clearance rings and mechanical seal assembly, from the pump without disturbing the mounting of the pump in the chassis. As an alternative, it must be possible to remove all these items without disturbing the pump body, manifolds and associated pipe work.
7. The pump discharge shall be rotatable to achieve different positions – 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 and 12 o'clock (by rotating the volute).
8. Pump impeller shall be hard, fine grain bronze of the mixed flow design, accurately machined and individually balanced. The vanes of the impeller intake eye shall be hand-ground and polished to a sharp edge. The impeller to be of sufficient size and design to provide ample reserve capacity. The impeller shall be keyed to the pump shaft.
9. Impeller clearance rings shall be bearing bronze, easily renewable without replacing impeller or pump body.
10. The inboard rear clearance ring shall be of a single labyrinth, intermeshing type design to provide extended life and better pump performance due to reduced recirculation.
11. The pump shaft shall be precipitation hardening stainless steel with a positive impeller lock. Pump shaft must be sealed with double lip oil seal to keep road dirt and water out of gearbox.
12. Pump shaft to be rigidly supported by rolling element bearings for minimum deflection and end

# Fouts Bros Fire Equipment

float. Shaft end float shall be controlled by the bearings and shall not be adjustable.

## **GEARBOX**

1. The gearbox as well as the pump shall be constructed and tested at the pump manufacturer's factory.
2. The aluminum alloy gearbox is designed to function without lubrication change for up to three years assuming manufacturer's specified gear oil is used.
3. The bearings and shaft shall be oil splash lubricated, by the gear rotation, to ensure that the pump can be operated at any angle up to 15° in any direction.
4. Gearbox shall be of sufficient size to withstand the torque of the engine in pump operating conditions. The gearbox shall be designed of ample capacity for lubrication reserve and to maintain the proper operating temperature.
5. Input shaft to be rigidly supported by rolling element bearings for minimum deflection and end float. Shaft end float shall be controlled by the bearings and shall not be adjustable.
6. The input shaft shall be of heat-treated nickel chromium molybdenum steel and shall withstand the torque of the engine in pump operating conditions. Input shaft must be sealed with oil seal to keep road dirt and water out of gearbox.
7. All gears both drive and pump, shall be of highest quality electric furnace chrome nickel steel. Bores shall be ground to size and teeth integrated and hardened, to give an extremely accurate gear for long life, smooth, quiet running, and higher load carrying capability. An accurately cut helical high contact design shall be provided. (No exceptions.)
8. The pump ratio shall be selected by the apparatus manufacturer to give maximum performance with the engine, transmission and power take-off selected.
9. The gearbox housing will be fitted with a cooling water system as standard.
10. The gearbox will be rotatable to achieve six different positions – horizontal left, horizontal left - 22.5° down, horizontal right, horizontal right – 22.5° down, inverted (input over pump) and vertical (pump over input).

## **MECHANICAL SEAL**

The pump shaft shall have only one mechanical seal. The mechanical seal shall be a self-adjusting mechanical type, incorporating a rotating spring-loaded hard carbon ring running against a stationary silicon carbide seat with a PTFE backup ring that provides best in class reliability. The seal shall be pre-loaded during pump assembly and shall require no maintenance or adjustments during its life. (No exceptions.)

## **ELECTRONIC PUMP MANUALS**

# Fouts Bros Fire Equipment

Two (2) sets of electronic fire pump service and operation manuals shall be provided with the completed apparatus.

## **PUMP WARRANTY**

The pump shall be covered by the Hale Pro-Tech 5-year pump warranty against workmanship and materials. Both parts and labor shall be covered for the first 2 years and years 3-5 shall have parts only coverage.

## **MIDSHIP FIRE PUMP DRIVESHAFTS AND INSTALLATION**

The midship PTO fire pump shall be installed and shall include installation of the fire pump, modification and/or fabrication of new drivelines and all pump-mounting brackets.

## **1000 GPM FIRE PUMP SPECIFICATIONS**

The centrifugal type fire pump shall be a Hale model MBP with a rated capacity of 1000 GPM. The pump shall meet NFPA 1901 requirements.

The pump shall be certified to meet the following deliveries:

1000 gpm (3785 L/M) @ 150 psi (10.3 bar)  
700 gpm (2646 L/M) @ 200 psi (13.8 bar)  
500 gpm (1893L/M) @ 250 psi (17.2 bar)

## **POWER TAKE OFF**

A ten (10) bolt Chelsea model 870-XDFJP-B5XV heavy duty transmission driven PTO shall be installed to drive the pump.

## **LEFT SIDE INLET - 6.00"**

One (1) 6.00" steamer inlet with male NST threads shall be provided on the left side of the pump module. The inlet shall have a removable screen.

## **INLET CAP**

One (1) 6.00" chrome plated cap with long handles and NST threads shall be supplied. The cap shall be capable of withstanding 500 PSI and be trimmed with the apparatus manufacturer's logo in the center of the cap.

## **RIGHT SIDE INLET - 6.00"**

# Fouts Bros Fire Equipment

One (1) 6.00" steamer inlet with male NST threads shall be provided on the right side of the pump module. The inlet shall have a removable screen.

## **INLET CAP**

One (1) 6.00" chrome plated cap with long handles and NST threads shall be supplied. The cap shall be capable of withstanding 500 PSI and be trimmed with the apparatus manufacturer's logo in the center of the cap.

## **PTO PUMP SHIFT SPECIFICATIONS -- PUMP AND ROLL**

An electric powered PTO pump shift shall be installed in the cab driver's area where not subject to accidental engagement. The pump shift system shall permit "pump and roll" operations, as well as stationary pumping operations.

The following indicators shall be provided and installed:

A green "**PUMP ENGAGED**" indicator shall be located in the cab and shall energize when the pump shift has successfully been completed.

A green "**OK TO PUMP**" indicator shall be located in the cab, and shall energize when the pump is engaged, the chassis transmission is in neutral, and the parking brake is engaged.

3. A green "**OK TO PUMP AND ROLL**" indicator shall be energized when the pump is engaged, the chassis transmission is in road gear, and the parking brake is released.

When the "**OK TO PUMP AND ROLL**" indicator is energized, the "**OK TO PUMP**" indicator shall not be energized.

The pump shall be capable of "Pump and Roll" up to 5 mph where the safety interlock shall disengage the PTO automatically.

## **PTO ENGAGEMENT SWITCHING**

One (1) rocker switch with indicator shall be installed on the switch panel in the cab to control the PTO engagement switch. The switch shall be labeled "PTO Engage".

## **REMOTE MOUNTED DISCHARGE PRESSURE GAUGE**

One (1) 2.50" Class1 master discharge pressure gauge shall be provided in the cab. The gauge shall read from 0" Hg. to 400 psi, and have a white face with black markings.

## **PIPING AND MANIFOLDS**



# Fouts Bros Fire Equipment

All the plumbing and/or piping in the pump module shall be of 304 stainless steel or flexible piping for long life. All stainless-steel castings shall be a minimum of schedule 40. All NPT pipe thread connections larger than 0.75" connections shall be avoided in the construction of the plumbing system. The following valves shall have groove connection: rear discharge, tank fill, all 2.00" and 2.50" pre-connect valves.

The flexible piping shall be black SBR synthetic rubber hose with 300 working pounds and 1,200 pounds burst pressure for sizes 1.50" through 4.00". Sizes 0.75", 1.00" and 5.00" are rated at 250 lb. working and 1,000 lb. burst pressure. All sizes are rated at 30 HG vacuum. Reinforcement consists of two (2) plies of high tensile strength tire cord for all sizes and helix wire installed in sizes 1.00" through 5.00" for maximum performance in tight bend applications. The material has a temperature rating of -40 degrees F to 210 degrees F. Full flow couplings are precision machined from high tensile strength stainless steel. All female couplings are brass. 0.75" and 1.00" male and Victaulic couplings are brass

## **INDIVIDUAL DRAINS**

All 2.00" or larger discharge outlets shall be equipped with a 0.75" ball valve drain valve or larger.

## **HOSE THREADS- NST**

All hose threads shall be National Standard Thread (NST) on all base threads on the apparatus intake and discharges, unless otherwise specified.

## **MASTER PUMP DRAIN**

The pump shall be equipped with a Class 1 Master Pump drain to allow draining of the lower pump cavities, volute and selected water carrying lines and accessories. The drain shall have an all brass body with a stainless steel return spring.

## **U.L. TEST POINTS**

Two (2) U.L. test points shall be mounted on the pump panel for testing of the vacuum and pressures. The test points shall be a single piece with individual ports for suction and discharge.

## **VALVES**

The valves shall be Akron Brass with stainless balls. The valves shall be bi-directional with full flow capability. The valves shall be of fixed pivot ball design with a flow pressure rating to meet NFPA-1901 standards. All 3.00" discharge valves shall be supplied with a true slow close mechanism per NFPA specifications.

# Fouts Bros Fire Equipment

## **INDIVIDUAL DRAINS**

One (1) individual Class1 quarter-turn up drain valve shall be furnished for each 1.50" or larger discharge port and each 2.50" gated auxiliary suction.

## **DISCHARGE GAUGES**

Individual Class 1 2.50" line gauges for each 2.00" or larger discharge shall be provided and mounted adjacent to the discharge valve control handle. The gauges shall indicate pressure from 0 to 400 PSI. The pressure gauge shall be fully filled with pulse and vibration dampening Interlube to lubricate the internal mechanisms to prevent lens condensation and to ensure proper operation to minus 40 degrees F. To prevent internal freezing and to keep contaminants from entering the gauge, the stem and Bourdon tube shall be filled with low temperature material and be sealed from the water system using an isolating Sub Z diaphragm located in the stem.

## **PUMP CERTIFICATION**

The fire pump shall be tested to meet the flow requirements of the pump. A written certification shall be provided with the completed vehicle.

## **FIRE PUMP PRIMING SYSTEM**

A Trident model# 31.003.7 air operated priming system shall be installed. The unit shall be of all brass and stainless steel construction and designed for fire pumps of 1,000 GPM or less. The primer shall be two-barrel design with 0.75" NPT connection to the fire pump.

The primer shall be mounted above the pump impeller so that the priming line will automatically drain back to the pump. The primer shall also automatically drain when the panel control actuator is not in operation. The inlet side of the primer shall include a brass 'wye' type strainer with removable stainless steel fine mesh strainer to prevent entry of debris into the primer body.

The primer shall require a minimum of 13.2 cubic foot per minute air compressor and shall be capable of meeting drafting requirements at high idle engine speed. The air supply shall be from a chassis supplied 'protected' air storage tank with a pressure protection valve. The air supply line shall have a pressure protection valve set between 70 to 80 PSIG.

The primer control shall have a manually operated, panel mounted "push to prime" air valve; which will direct air pressure from the air brake storage tank to the primer body. To prevent freezing, no water shall flow to and from the panel control.

## **CLASS ONE STAINLESS INTAKE RELIEF VALVE**

# Fouts Bros Fire Equipment

The apparatus shall be equipped with a Class1 inlet relief valve that is of all stainless-steel construction. It shall have an adjustable pressure relief setting from 75 psi to 350 psi and is factory preset at 125 psi. The valve shall have a 2.50" male NST threaded discharge outlet. The valve shall meet NFPA 1901 requirements for pump inlet relief valve.

## **PUMP COOLING/BYPASS LINE**

There shall be a 0.25" line installed from the discharge side of the pump to the water tank. The line shall be used to cool the pump during long periods of pumping when water is not being discharged. The pump cooler shall be controlled with a quarter-turn ball valve on main pump panel, and shall be clearly labeled "Pump Cooler".

## **PRESSURE GOVERNOR and ENGINE MONITORING DISPLAY**

Fire Research PumpBoss Max series PBA501-D00 pressure governor and control module kit shall be installed. The kit shall include a control module, intake pressure sensor, discharge pressure sensor, and cables. The control knob shall be 2" in diameter with no mechanical stops, have a serrated grip, and a red idle push button in the center. It shall not extend more than 2" from the front of the control module. The control LCD shall be 3.5" in size with a minimum brightness of 1000 nits and optically bonded to 3mm Borofloat Glass. Inputs for monitored engine information shall be from a J1939 data bus or independent sensors. Outputs for engine control shall be on the J1939 data bus. Inputs from the pump discharge and intake pressure sensors shall be electrical.

The following continuous displays shall be provided:

- Engine RPM; shown on LCD screen
- Check engine and stop engine warning; shown on LCD screen
- Engine oil pressure; shown on LCD screen
- Engine coolant temperature; shown on LCD screen
- Transmission Temperature; shown on LCD screen
- Battery voltage; shown on LCD screen
- Pressure and RPM operating mode LEDs
- Pressure / RPM setting; shown on LCD screen
- Throttle ready / Ok to Pump LEDs.

On screen (LCD) message display shall show diagnostic and warning messages as they occur. It shall show monitored apparatus information, stored data, and program options when selected by the operator. LCD Screen and LED's intensity shall be automatically adjusted for day and nighttime operation.

The program shall store the accumulated operating hours for the pump and engine to be displayed with the push of a button. It shall monitor inputs and support audible and visual warning alarms for the following conditions:

# Fouts Bros Fire Equipment

- High Battery Voltage
- Low Battery Voltage (Engine Off)
- Low Battery Voltage (Engine Running)
- High Transmission Temperature
- Low Engine Oil Pressure
- High Engine Coolant Temperature
- Out of Water (visual alarm only)
- No Engine Response (visual alarm only).

The program features shall be accessed via push buttons located on the front of the control module. There shall be a USB port located at the rear of the control module to upload future firmware enhancements.

The pressure governor shall operate in two control modes, pressure and RPM. No discharge pressure or engine RPM variation shall occur when switching between modes. A throttle ready and Ok to Pump LED shall light when the interlock signal is recognized. The pressure governor shall start in pressure mode and set the engine RPM to idle. In pressure mode the pressure governor shall automatically regulate the discharge pressure at the level set by the operator. In RPM mode the governor shall maintain the engine RPM at the level set by the operator except in the event of a discharge pressure increase. The pressure governor shall limit a discharge pressure increase in RPM mode to a maximum of 30 psi. Other safety features shall include recognition of low water and no water conditions with an automatic programmed response and a push button to return the engine to idle.

The pressure governor control module shall be programmed at installation for a specific engine.

## **LEFT SIDE AUXILIARY SUCTION**

One (1) 2.50" intake with an Akron Brass valve shall be located on the left side panel. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The valve shall come equipped with an inlet strainer and a 2.50" NST chrome inlet swivel.

The side auxiliary inlet will incorporate a quarter-turn ball valve with a swing-type manual control located adjacent the intake.

One (1) 2.50" chrome plated plug shall be provided. The plug shall be equipped with MNST threads, rocker lugs, and chain.

## **TANK TO PUMP LINE**

One (1) 3.00" tank to pump line shall be provided for connection between the water tank and the fire pump. The valve shall be a 3.00" Akron Brass quarter turn ball type.

# Fouts Bros Fire Equipment

The valve shall be actuated with an air cylinder. The valve shall be controlled with a switch at the pump panel.

## **TANK FILL/ RECIRULATION LINE**

One (1) 2.00" discharge with an Akron Brass valve shall be plumbed to the tank. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

## **LEFT SIDE FRONT PANEL DISCHARGE**

One (1) 2.50" discharge with an Akron Brass valve shall be located on the left side panel. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

The discharge shall be equipped with an integral, stainless steel, 30-degree elbow terminating with 2.50" MNST threads.

One (1) 2.50" chrome plated cap with self-venting lugs shall be provided. The cap shall be equipped with FNST threads, rocker lugs, and chain.

## **LEFT SIDE REAR PANEL DISCHARGE**

One (1) 2.50" discharge with an Akron Brass valve shall be located on the left side panel. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

The discharge shall be equipped with an integral, stainless steel, 30-degree elbow terminating with 2.50" MNST threads.

# Fouts Bros Fire Equipment

One (1) 2.50" chrome plated cap with self-venting lungs shall be provided. The cap shall be equipped with FNST threads, rocker lugs, and chain.

## **RIGHT SIDE FRONT PANEL DISCHARGE**

One (1) 2.50" discharge with an Akron Brass valve shall be located on the right side panel. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

The discharge shall be equipped with an integral, stainless steel, 30-degree elbow terminating with 2.50" MNST threads.

One (1) 2.50" chrome plated cap with self-venting lungs shall be provided. The cap shall be equipped with FNST threads, rocker lugs, and chain.

## **RIGHT SIDE REAR PANEL DISCHARGE**

One (1) 2.50" discharge with an Akron Brass valve shall be located on the right side panel. The valve shall be a quarter turn ball type and fixed pivot design to allow easy operation at all pump pressures.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

The discharge shall be equipped with an integral, stainless steel, 30-degree elbow terminating with 2.50" MNST threads.

One (1) 2.50" chrome plated cap with self-venting lungs shall be provided. The cap shall be equipped with FNST threads, rocker lugs, and chain.

## **CROSSLAY PRE-CONNECT DISCHARGE #1**

# Fouts Bros Fire Equipment

One (1) 1.75" crosslay pre-connect with a 2.00" Akron Brass valve shall be installed in the pump module above the pump. The crosslay shall be plumbed using 2.00" stainless steel pipe, and/or flexible piping.

The crosslay discharge shall terminate below the hose bed floor with a 1.50" NSTM chicksan swivel adapter. The crosslay hose bed floor shall be slotted to allow the swivel to extend up through the floor, allowing the pre-connected hose to be pulled off either side of the apparatus without kinking the hose at the coupling connection.

Crosslay discharge #1 shall be designed to have a minimum total capacity of 3.5 cubic feet as required by NFPA -1901 to accommodate a minimum of 200 feet of 1.75" fire hose.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

## **CROSSLAY PRE-CONNECT DISCHARGE #2**

One (1) 1.75" crosslay pre-connect with a 2.00" Akron Brass valve shall be installed in the pump module above the pump. The crosslay shall be plumbed using 2.00" stainless steel pipe, and/or flexible piping.

The crosslay discharge shall terminate below the hose bed floor with a 1.50" NSTM chicksan swivel adapter. The crosslay hose bed floor shall be slotted to allow the swivel to extend up through the floor, allowing the pre-connected hose to be pulled off either side of the apparatus without kinking the hose at the coupling connection.

Crosslay discharge #2 shall be designed to have a minimum total capacity of 3.5 cubic feet as required by NFPA -1901 to accommodate a minimum of 200 feet of 1.75" fire hose.

The quarter turn valve shall be manually operated with a Class 1 locking push pull control rod. It shall have a chrome plated zinc handle with a recessed area for 1.00" x 3.00" identification tag. The controls shall be locked in any position.

The discharge shall also come equipped with a quarter-turn 0.75" drain valve and a matching color coded bezel.

## **CROSSLAY #3, HOSEBED ("DEADLAY")**

One (1) crosslay style "deadlay" hosebed shall be installed above the pump. The deadlay shall have the capacity to hold 250' of 2.50" fire hose and nozzle.

# Fouts Bros Fire Equipment

## **CROSSLAY DIVIDER(S)**

Two (2) crosslay dividers shall be provided, one (1) between the #1 and #2 crosslay, and one (1) between the #2 and #3 crosslay.

Each divider shall be constructed from 0.188" thick abraded aluminum plate and shall be mounted on a base T-extrusion that provides lower support the length of the divider. There shall be a hand hole on each side of the dividers to assist the firefighter.

## **VINYL CROSSLAY COVER**

The crosslays shall be equipped with a heavy duty 18 oz. vinyl cover with side flaps. The top portion will be fastened to the pump house with Velcro and the side flaps will be held in place with a hook and bungee system.

The vinyl cover shall be red in color.

## **4.50" MASTER PRESSURE GAUGE**

One (1) Class1, 4.50" liquid filled master pressure gauge with stainless steel bezel shall be provided, reading from 0 Hg. to 400 psi. It shall be accurate to within 1%. The gauge shall have a white face and black markings. The gauge shall be located on the pump operator's panel.

## **4.50" MASTER INTAKE GAUGE**

One (1) Class 1, 4.50" liquid filled master intake gauge(s) with stainless steel bezel shall be provided, reading from -30" Hg. to 400 psi. It shall be accurate to within 1%. The gauge shall have a white face and black markings. The gauge shall be located on the pump operator's panel.

## **LED WATER LEVEL GAUGE (PUMP PANEL)**

One (1) Innovative Controls Soft-Glo model # 3050869-03-W-37 LED water level monitor kit shall be provided and installed on the left hand side pump operator's control panel. The display shall show the volume of water in the tank using 4 distinct illuminated levels. Tank level indication is enhanced by the use 180° wide-angle diffusion lenses in front of the LEDs. The LEDs are diffused by a proprietary method that creates an illumination effect that remains bright but eliminates the typical irritation to an operator's eyes traditionally caused by bright LEDs.

The gauge shall use a pressure transducer #3030376-01 installed near the bottom of the water tank to determine the correct volume in the tank.

## **CAB MOUNTED WATER TANK INDICATOR**



# Fouts Bros Fire Equipment

One (1) Innovative Controls Soft-Glo model #3050853-W-37 mini tank level display shall be provided and installed on the console in the cab. The display(s) shall show the volume in the tank on 4 distinct illuminated levels. The display shall mimic the main pump panel mounted display via CAN Bus.

## **LARGE LIGHT WATER LEVEL GAUGE, EACH SIDE OF BODY**

Three (3) large LED water level gauges shall be provided, one (1) on both sides of the body and one (1) on the rear. Each side shall have a Innovative Controls Soft-Glo Mini Monster LED strip light mounted on the body as directed. Each light shall be surface mounted.

The strip lights shall be mounted as to indicate the following water levels:

- Green LED cluster                      Full tank
- Blue LED cluster                        3/4 tank
- Amber LED cluster                      1/2 tank
- Red LED cluster                         1/4 tank

Each display shall mimic the main pump panel mounted display via CAN Bus.

## **PUMP, MODULE, AND RELATED ITEMS**

### **PUMP MODULE BODY**

The pump module body shall be a self-supported structure mounted independently from the body and chassis cab. The pump module shall be constructed entirely of extrusions and aluminum plate. The framework shall be formed from beveled aluminum alloy extrusions and shall be electrically seam welded at each joint using 5356 aluminum alloy welding wire. The main framework to be 3.00 x 3.00 x 0.18, or 3.00 x 1.5 webbed 0.25, 6063-T5 aluminum extrusion. The pump module design must allow normal frame deflection through isolation mounts without imposing stress on the pump module structure or side running boards. The pump module shall consist of a welded framework, properly braced to withstand chassis frame flexing. The pump module support shall be bolted to the frame rails of the chassis.

### **PUMP MODULE WIDTH**

Pump Module to be 36.00" (side to side).

### **PUMP PANEL MATERIAL**

The left side operator's panel, gauge panel, right side pump panel and right side access door shall be fabricated from 14-gauge 304L stainless steel with a #4, (150/180 grit), standard brushed finish.

### **GAUGE PANEL**

# Fouts Bros Fire Equipment

The pump operator's upper gauge panel shall be located on the left hand side of the pump module above the main control panel. It shall be horizontally hinged and shall have two (2) latches.

## **PUMP ENCLOSURE ACCESS DOOR -- RIGHT SIDE UPPER**

A vertically hinged pump panel access door shall be provided on the upper right side of the side mount pump enclosure. The access door shall be approximately 22.00" high and as wide as possible. The door shall have three (3) push button type latches. The drains located on the officer's side panel shall be fastened to the lower panel, which shall be stationary.

## **PUMP PANEL LIGHT SHIELD, LH SIDE PANEL**

One (1) LED strip light shall be installed under an instrument panel light hood on the left side pump panel.

## **PUMP PANEL LIGHT SHIELD, RH SIDE PANEL**

One (1) LED strip light shall be installed under an instrument panel light hood on the right side pump panel.

A weather resistant switch, located on the pump operator's panel shall be provided to activate the lights.

## **PUMP COMPARTMENT LIGHT**

One (1) LED strip light shall be provided inside the pump compartment area. The light shall activate with the switch on the pump operator's panel.

## **LEFT SIDE RUNNING BOARD**

The left pump panel shall be equipped with a side running board. The running board shall be constructed of 0.125" embossed fire apparatus bright aluminum treadplate. It shall be a minimum of approximately 11.00" deep x the width of the module. The running board shall have an upward bend on the inside edge to act as a kick plate. The running board shall be attached to a frame mounted outrigger support structure. The running board shall have a 3.00" downward bend on the front and side faces with a 1.00" underside return for superior strength.

## **RIGHT SIDE RUNNING BOARD**

The right pump panel shall be equipped with a side running board. The running board shall be constructed of 0.125" embossed fire apparatus bright aluminum treadplate. It shall be a minimum of approximately 11.00" deep x the width of the module. The running board shall have an upward bend on the inside edge to act as a kick plate. The running board shall be attached to a frame mounted

# Fouts Bros Fire Equipment

outrigger support structure. The running board shall have a 3.00" downward bend on the front and side faces with a 1.00" underside return for superior strength.

## **FRONT PUMP HOUSE COVER**

The front of the pump enclosure shall be covered with .125" aluminum treadplate.

## **REAR PUMP HOUSE COVER**

The rear of the pump enclosure shall be covered with .125" aluminum treadplate.

## **HOSE RESTRAINT LABEL - FAMA# 22**

A permanent label shall be provided near any hose storage area. The label shall instruct the operator to insure that all hose is properly secured prior to placing the apparatus in motion and to provide warning of potential dangers, including injury or death, in failing to do so.

## **INTAKE/DISCHARGE CAP PRESSURE LABEL - FAMA# 18**

A permanent label shall be provided in all areas that intakes and discharges are capped. The label shall give instruction on how to properly remove the cap. The label shall also warn of potential dangers, injury or death that be caused by failing to follow proper cap removal procedures.

## **TRAINED OPERATOR ONLY LABEL - FAMA# 25 ]**

A permanent label shall be provided on the pump panel that states that only properly trained personnel should operate the apparatus and shall indicate that injury or death could occur as a result.

## **PUMP PANEL ID PLATE**

An identification plate shall be installed on the pump operator control panel to identify the fire pump serial number, model number, and performance.

## **COLOR CODED PUMP PANEL LABELING AND NAMEPLATES**

Discharge and intake valve controls shall be color coded in compliance to guidelines of applicable sections of NFPA standards. Innovative Controls permanent type nameplates and instruction panels shall be installed on the pump panel for safe operation of the pumping equipment and controls.

== SUPER TANKER BODY - TANDEM AXLE, WETSIDE, STANDARD - 7.250 03/07/23 ==

## **WATER TANK AND RELATED COMPONENTS**

### **3000 GALLON POLY TANK**

# Fouts Bros Fire Equipment

Tank capacity shall be 3000 US gallons / 2498 Imperial gallons / 11356 Liters.

The tank shall be constructed of polypropylene material.

## **TANK MATERIAL**

This material shall be a non-corrosive stress relieved thermoplastic and UV stabilized for maximum protection. Tank shell thickness may vary depending on the application and may range from 0.50" to 1.00" as required. Internal baffles are generally 0.375" in thickness.

## **CONSTRUCTION**

The booster and/or foam tank shall be of a specific configuration and is so designed to be completely independent of the body and compartments. Joints and seams shall be fused using nitrogen gas as required and tested for maximum strength and integrity. The top of the booster tank is fitted with removable lifting assembly designed to facilitate tank removal. The transverse and longitudinal swash partitions shall be manufactured of a minimum of 0.375" polypropylene.

All partitions shall be equipped with vent and air holes to permit movement of air and water between compartments. The partitions shall be designed to provide maximum water flow. All swash partitions interlock with one another and are completely fused to each other as well as to the walls of the tank. All partitions and spacing shall comply with NFPA 1901. Tolerances in design allow for a maximum variation of 0.125" on all dimensions.

The tank cover shall be constructed of 0.50" thick polypropylene and UV stabilized, to incorporate a multi-piece locking design, which allows for individual removal and inspection if necessary. The tank cover(s) shall be flush or recessed 0.375" from the top of the tank and shall be fused to the tank walls and longitudinal partitions for maximum integrity. Each one of the covers shall have hold downs consisting of 2.00" minimum polypropylene dowels spaced a maximum of 40.00" apart. These dowels shall extend through the covers and will assist in keeping the covers rigid under fast filling conditions. A minimum of two (2) lifting dowels shall accommodate the necessary lifting hardware.

## **OUTLETS**

There will be two (2) standard tank outlets: one (1) for the tank-to-pump suction line, which shall be sized to provide adequate water flow to the pump; and, one (1) for tank fill line, which shall be sized according to the NFPA minimum size chart for booster tanks. All tank fill couplings shall be backed with flow deflectors to break up the stream of water entering the tank, and be capable of withstanding sustained fill rates of up to 1000 gpm.

## **CAPACITY CERTIFICATION**

# Fouts Bros Fire Equipment

All water and foam tanks shall be tested and certified as to capacity.

## **CENTER OF GRAVITY**

A center of gravity calculation shall be determined for each tank and provided as requested in order to provide the apparatus manufacturer with the necessary data to design and certify the apparatus with respect to the NFPA requirements regarding rollover stability. This information may be used by the apparatus manufacturer to assist in the calculation of the apparatus's ability to meet the tilt table static rollover threshold or calculated Center of Gravity requirements per NFPA.

## **WATER FILL TOWER AND COVER**

The tank shall have a combination vent and manual anti-surge fill tower. The fill tower shall be constructed of 0.50" polypropylene and shall be a minimum dimension of 14.00" x 14.00" outer perimeter. The tower shall have a 0.25" thick removable polypropylene screen and a polypropylene hinged cover. The capacity of the tank shall be engraved on the top of the fill tower lid.

The fill tower shall have an anti-surge provision. It shall be designed to prevent water splashing up through the top of the fill tower when the water tank is full, and the apparatus comes to an immediate stop. (NO EXCEPTION)

## **FILL TOWER LOCATION**

The fill tower shall be located in the left front area of the tank.

Inside the fill tower there shall be a combination vent/overflow pipe. The vent overflow shall have a minimum I.D. of 6.00" and is designed to run through the tank, and shall be piped to discharge water behind the rear wheels as required in NFPA 1901 so as to not interfere with rear tire traction.

## **SUMP**

There shall be one (1) sump standard per tank. The sump shall be constructed of a minimum of 0.50" polypropylene and be located in the left front quarter of the tank, unless specified otherwise. On all tanks that require a front suction, a 3.00" schedule 40 polypropylene pipe shall be installed that will incorporate a dip tube from the front of the tank to the sump location. All tanks shall have an anti-swirl plate located approximately 3.00" above the inside floor.

## **WATER TANK CLEAN-OUT PLUG**

The tank shall have a 4.00" N.P.T. threaded outlet on the bottom for a cleanout/ drain plug per NFPA. The cleanout/ drain plug shall be installed in the bottom of the water tank using an 8-Bolt flange with a 4.00" N.P.T. threaded outlet to create easy access to the plug. (NO EXCEPTION)

## **MOUNTING BLOCKS, TANK SIDES**

# Fouts Bros Fire Equipment

There will be four (4) mounting blocks, two (2) on each side for mounting equipment such as ladder brackets.

## **MOUNTING BLOCK, REAR TANK FACE**

A 1.00" mounting block shall cover the whole rear of tank for mounting work lights, folding steps, grab rails, accessories and emergency lighting.

A 1.00" mounting block shall on the front left hand side of the tank for mounting folding steps, grab rails, and accessories.

A 1.00" mounting block shall on the front right hand side of the tank for mounting folding steps, grab rails, and accessories.

## **REAR CAMERA NOTCH**

A recessed mounting area for a backup camera shall be built into the rear of the tank. As high and as close to the center line as possible.

## **HOSE BED**

There shall be a hose bed area constructed of polypropylene on the top of the tank consisting of two side walls and one front panel. The hose bed shall be welded to the outside perimeter of the tank cover, and shall be approximately 10.00" tall by the length and width of the water tank.

The hose bed shall be free from all projections, which may interfere with the unloading of hose.

## **HOSE BED STORAGE CAPACITY**

The hose bed shall be designed to have a storage capacity for a minimum of 80.00 cubic feet of fire department supplied fire hose.

## **HOSEBED FLOOR**

The floor of the hose bed shall be grooved by the tank manufacturer to provide an integral planking designed to allow the loaded hose to drain and allow airflow for ventilation.

## **HOSE BED DIVIDER TRACKS**

Hose bed divider tracks shall be installed in the hose bed. The tracks shall allow hose bed dividers (if specified) to be adjustable, from side to side in the hose bed, to accommodate varying hose loads.

# Fouts Bros Fire Equipment

## **VINYL HOSEBED COVER**

The apparatus shall be equipped with a 18 oz. vinyl Hosebed cover with a rear flap and a hook and bungee fastening system at front and sides. The rear flap shall be fastened with three (3) 2.00" side release plastic buckle assemblies. The vinyl material shall be treated for protection against UV rays and mildew.

The vinyl cover shall be red in color.

## **REAR DUMP VALVE**

One (1) NEWTON 10.00" Model 1050-34 Stainless Steel dump valve shall be installed. It shall be located at the rear center of the apparatus.

One (1) manual operated lever control shall be used to open and close the dump valve, the lever shall be located on the top of the valve.

## **SWIVEL DUMP SYSTEM**

A Newton Model 6012SW-34 stainless steel swivel dump chute extension shall be mounted on the rear dump valve. The unit shall be able to rotate 180 degrees and lock in place while the apparatus is in motion. With the swivel attached, the chute shall be capable of flowing 2,777 gpm.

## **TELESCOPIC EXTENSION CHUTE**

One (1) Newton, model 4036-8X12-34, manual stainless steel telescoping extension chute shall be installed on the swivel. The extension chute shall be capable of extending 36.00" past the dump valve.

## **DIRECT TANK FILL - LEFT HAND SIDE**

There shall be a one (1) 2.50" direct tank fill located on the left-rear of the apparatus. The valve shall be an Akron 8800 Series swing out valve. This valve shall be operated using a direct manual actuator handle. Valve inlet shall be a 2.50" female hose thread adapter and feature a 30 degree droop with a wire screen inlet strainer and a swivel.

## **PLUG**

One (1) 2.50" chrome plated plug shall be provided. The threads shall be NST and the plug shall be equipped rocker lugs and chain.

## **DIRECT TANK FILL REDUCER -RIGHT HAND SIDE**

# Fouts Bros Fire Equipment

The 4.00" FNPT inlet on the right hand side rear of the tank shall be reduced down to 2.50" FNPT. This shall allow the future installation of a LDH rear tank fill.

## **DIRECT TANK FILL - RIGHT HAND SIDE**

There shall be a one (1) 2.50" direct tank fill located on the right-rear of the apparatus. The valve shall be an Akron 8800 Series swing out valve. This valve shall be operated using a direct manual actuator handle. Valve inlet shall be a 2.50" female hose thread adapter and feature a 30 degree droop with a wire screen inlet strainer and a swivel.

## **PLUG**

One (1) 2.50" chrome plated plug shall be provided. The threads shall be NST and the plug shall be equipped rocker lugs and chain.

## **SUBFRAME**

The sub frame shall be constructed from structural steel channel and plate, welded together and bolted to the chassis frame. The main support shall be a 0.3125" thick steel plate under the tank floor with a 2.50" angle steel around the perimeter of the tank. Two (2) sub frame long sills constructed of 3.00" X 7.00" steel tubing with 0.1875" walls shall run the full length of the subframe and be mounted to truck frame using 0.1875" angle clips and a minimum of ten (10) grade 8 bolts. The tank sub frame and attachments shall be in strict compliance with UPF poly-tanks engineering specifications.

## **MOUNTING**

The tank shall rest on the subframe as to not allow for more than 530 square inches of unsupported area under the tank floor. In cases where overall height of the tank exceeds 40 inches the subframe shall be designed to allow for not more than 400 square inches of unsupported area.

The tank shall be supported to prevent itself from shifting during vehicle operation.

A non-corrosive protective liner shall be installed in between the tank and the subframe.

The tank shall be mounted to sub frame with three (3) stainless steel gussets per UPF specifications.

The tank and sub frame must be installed by a UPF Authorized installer (NO EXCEPTIONS).

## **BODY CONSTRUCTION**

The body shall be fabricated of steel tubing, angle, smooth aluminum sheet and aluminum treadplate.



# Fouts Bros Fire Equipment

The tubing shall be designed as structural-framing members with the smooth aluminum and treadplate fabricated to form compartments, floors and fender panels

The side compartments shall be modular in design and shall be capable of being replaced if damaged. Each shall be supported by the steel frame and attached to the sub frame with grade 8 bolts.

All body compartments will have a method of ventilation provided either by louvers stamped into a wall or another method to allow the compartments to aerate. The ventilation design will provide the proper airflow inside the compartments and prevent water from dripping into the compartment.

The side compartments shall be constructed of formed 0.125" aluminum.

Compartment flooring will be of the sweep out design

## **FENDER PANELS - ATP**

The rear fender panels shall be constructed of 0.125" bright aluminum tread plate and be an integral part of the tanker body.

## **BODY FINISH - ATP**

The compartments and fenders, together forming the body, shall remain unpainted.

## **WHEEL WELL DESIGN**

The rear wheel wells shall be radius cut for a streamlined appearance.

## **FENDERETTES**

Four (4) polished stainless steel fenderettes shall be provided over the rear tandem wheel well openings, one (1) each side. Each fenderette shall be made of 14 gauge 304 stainless steel. The stainless steel fenderette shall be secured into place with stainless steel fasteners and shall be easily removable for replacement.

**The fenderettes must be bolted into place and removable for replacement.**

## **ROLL-UP DOORS - AMDOR**

All lower compartment doors shall be equipped with AMDOR brand roll-up doors. The slats shall be 1.00" double wall aluminum with continuous ball and socket hinge joints designed to prevent water ingress and weather tight recessed dual durometer seals. The interior door curtains shall be

# Fouts Bros Fire Equipment

smooth to prevent equipment hang-ups. The door tracks and side frames shall each be one-piece aluminum. Each side seal shall be recessed, and non-marring with UV stabilizers to prevent warping. The bottom panel flange shall have cut-outs for ease of access with gloved hands. The door strikers shall provide support beneath the lift bar to prevent door curtain bounce and potential false door ajar indications.

The bottom rail lift bars shall be constructed of stainless steel.

## **LEFT SIDE COMPARTMENT IN FRONT OF REAR WHEELS, L-1**

One (1) compartment shall be supplied on the left hand side of the truck in front of the rear wheels. Compartment dimensions shall be approx. 60.00" wide by 26.00" deep by 27.00" high.

The compartment shall have a roll up door. The door shall have a satin finish.

### **COMPARTMENT LIGHT**

One (1) 13.00" Luma Bar clear LED strip light shall be installed vertically inside the compartment.

The compartment light(s) shall be controlled by a magnetic "On-Off" switch located on each compartment door.

## **LEFT SIDE COMPARTMENT BEHIND REAR WHEELS, L-2**

One (1) compartment shall be supplied on the left hand side of the truck behind of the rear wheels. Compartment dimensions shall be approx. 24.00" wide by 26.00" deep by 27.00" high.

The compartment shall have a roll up door. The door shall have a satin finish.

### **COMPARTMENT LIGHT**

One (1) 13.00" Luma Bar clear LED strip light shall be installed vertically inside the compartment.

The compartment light(s) shall be controlled by a magnetic "On-Off" switch located on each compartment door.

## **RIGHT SIDE COMPARTMENT IN FRONT OF REAR WHEELS, R-1**

One (1) compartment shall be supplied on the right hand side of the truck in front of the rear wheels. Compartment dimensions shall be approx. 60.00" wide by 26.00" deep by 27.00" high.

The compartment shall have a roll up door. The door shall have a satin finish.

### **COMPARTMENT LIGHT**

# Fouts Bros Fire Equipment

One (1) 13.00" Luma Bar clear LED strip light shall be installed vertically inside the compartment.

The compartment light(s) shall be controlled by a magnetic "On-Off" switch located on each compartment door.

## **RIGHT SIDE COMPARTMENT BEHIND REAR WHEELS, R-2**

One (1) compartment shall be supplied on the right hand side of the truck behind of the rear wheels. Compartment dimensions shall be approx. 24.00" wide by 26.00" deep by 27.00" high.

The compartment shall have a roll up door. The door shall have a satin finish.

### **COMPARTMENT LIGHT**

One (1) 13.00" Luma Bar clear LED strip light shall be installed vertically inside the compartment.

The compartment light(s) shall be controlled by a magnetic "On-Off" switch located on each compartment door.

## **DROP TANK STORAGE- RH SIDE**

There shall be room to store an appropriate size dump tank under the right hand side "T" portion of the tank. The area shall have a mechanical means to lock the dump tank in place while the apparatus is in motion.

The tank shall slide in horizontally into the hold from the right side of the body.

The storage shall have the capacity for one (1) 3000 US Gallon portable tank with an aluminum frame.

## **HARD SUCTION STORAGE- LH SIDE**

There shall be a hard suction storage tray located under the left hand side of the "T" portion of the tank. The hard suction hose storage shall be accessed from the ground at the rear of the unit.

In order to provide a comfortable and safe level of access to the hoses, there shall be no exception allowed to this feature.

The suction storage shall have capacity for two (2) 10.00' sections of hard suction hose.

## **REAR TAILBOARD**

A rear beavertail tailboard shall be provided and installed at the rear of the apparatus. The tailboard shall consist of two (2) separate stepping/ standing surfaces made of aluminum grip-strut material.

# Fouts Bros Fire Equipment

The top step shall be 7.00" deep and the bottom shall be 9.50" deep.

The outside edges of the rear tailboard shall be trimmed with bright diamond plate aluminum.

The tailboard shall meet recommended requirements for non-slip surfaces. This area is to be used as a step but is not designed to carry personnel and should never be used to transport firemen.

## **STEPS**

All steps shall have a surface area of at least 35 square inches and shall be able to withstand a load of at least 500 pounds.

## **REAR FOLDING STEPS**

Innovative Controls model 3004234 folding steps shall be furnished and located, at the rear of the apparatus. The exact number of steps provided may vary depending upon body configuration and options.

## **FOLDING STEPS- RH SIDE FRONT OF BODY**

Innovative Controls model 3007732 folding steps shall be furnished and located, at the right hand front of the body. The exact number of steps provided may vary depending upon body configuration and options.

## **EXTERIOR GRAB RAILS**

Each grab rail shall be non-slip, 1.25" diameter extruded polished aluminum grab rails with rubber inserts designed to provide maximum gripping ability, strength, and durability. The rails shall comply with NFPA 1901.

## **GRAB RAILS, REAR STEP, VERTICAL**

Two (2) extruded aluminum non-slip grab rails shall be provided and vertically mounted on the rear of the apparatus, one (1) on each side of the body.

## **GRAB RAIL, LH FRONT**

One (1) extruded aluminum non-slip grab rail shall be provided and mounted on the front, upper, left hand side of the body.

## **GRAB RAIL, RH FRONT**

# Fouts Bros Fire Equipment

One (1) extruded aluminum non-slip grab rail shall be provided and mounted on the front, upper, right hand side of the body.

== 12V ELECTRICAL SYSTEM - TANKER - 7.250 03/07/23 ==

## **12 VOLT ELECTRICAL SECTION**

### **NFPA 1901 CERTIFIED 12 VOLT ELECTRICAL SYSTEM**

The 12-volt apparatus body electrical system shall be provided and shall be in compliance with NFPA 1901 testing and certification procedures as follows:

### **NFPA MINIMUM ELECTRICAL LOAD DEFINITION**

The NFPA 1901 defined minimum electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode:

1. Propulsion engine and transmission.
2. The clearance and marker lights.
3. Communication equipment. 5 amp default.
4. Illumination of all walking surfaces, the ground at all egress points, control and instrumentation panels and 50% of total compartment lighting.
5. Minimum warning lights required for "blocking right of way" mode.
6. The current to simultaneously operate and fire pump and all specified electrical devices.
7. Anything defined by the purchaser, in the advertised specifications, to be critical to the mission of the apparatus.

### **RESERVE CAPACITY TEST**

The first electrical test to be performed will be the Reserve Capacity Test. All items listed in NFPA Minimum Load Definition shall be activated with the engine shut off. After 10 minutes of operation, the items 1-7 shall be deactivated. After deactivation, the battery system shall have ample reserve to start the engine.

### **ALTERNATOR PERFORMANCE TEST AT IDLE**

The second electrical test to be performed shall be Alternator Performance Test at Full Load. All electrical loads shall be activated with the engine running up to the governed rpm for two hours.

# Fouts Bros Fire Equipment

During the test, the system voltage shall not drop below 11.7 volts or have excessive battery discharge for more than 120 seconds. Any loads not defined in the NFPA Minimum Electrical Load may be load managed to pass test.

## **TEST CONDITIONS**

All electrical testing shall be performed with the engine compartment at approximately 200 degrees.

## **12 VOLT ELECTRICAL SYSTEM**

The truck shall have a 12-Volt electrical system.

All wiring will be run in convoluted high temperature plastic loom. Wiring shall be color and function coded and will be of adequate size to handle the assigned load. All solenoids, relays, and terminal blocks will be located in an easily accessible area.

All circuits provided shall have properly rated low voltage over current protective devices.

All wiring shall be stranded copper or copper alloy conductors of a gauge rated to carry 125 percent of the maximum current for the protected circuit. Voltage drops in all wiring from the power source to the using device shall not exceed 10 percent. The wiring and wiring harness and insulation shall be in conformance to applicable SAE and NFPA standards. The wiring harness shall conform to SAE J-1128 with GXL temperature properties. All exposed wiring shall be protected in a loom with a minimum 289 degree Fahrenheit rating. All wiring looms shall be properly supported and attached to body members. The electrical conductors shall be constructed in accordance with applicable SAE standards, except when good engineering practice requires special construction.

Electromagnetic interference suppression shall be provided as required to satisfy the radiation limits specified in SAE J551/1.

## **INNOVATIVE CONTROLS MULTIPLEXING SYSTEM**

The electrical system shall utilize an Innovative Controls multiplexing system where applicable.

## **HAZARD LIGHT**

One (1) flashing red LED light, located in the driving compartment, the light shall be illuminated automatically whenever any compartment door is ajar.

The hazard light shall be marked with a sign that reads "Do Not Move Apparatus When Light is On".

The warning light shall be interlocked to the parking brake and shall only alert the driver when the parking brake is released. The light shall also be used to signal that other ancillary equipment such

# Fouts Bros Fire Equipment

as racks light towers etc. are not in their “ready for transport” position.

## **ROCKER SWITCH PANEL - EIGHT (8) POSITION**

A lighted eight (8) position rocker type switch panel shall be installed to provide the ability to de-activate individual lighting units.

## **MASTER WARNING SWITCH**

A master switch shall be included in the main rocker switch panel. The switch shall be labeled “Master Warning” for identification. The switch shall feature control over all devices wired through it. Any warning device switch shall automatically power up when the master switch is activated.

## **CHASSIS GROUND LIGHTS**

LED ground lights with outward facing angle brackets shall be installed, one (1) under each chassis door.

## **PUMP PANEL GROUND LIGHTS -SUPPLIED WITH PUMP**

Two (2) LED ground lights with an outward facing angle brackets shall be installed under the pump panel running boards. One (1) light shall be located on the driver side and one (1) light located on the officer side of the apparatus.

## **FRONT OF BODY GROUND LIGHTS**

Two (2) LED ground lights with outward facing angle brackets shall be installed under the front of the body. One (1) light shall be located on the driver side and one (1) light shall be located on the officer side of the apparatus.

## **REAR STEP GROUND LIGHTS**

Two (2) LED ground lights with outward facing angle brackets shall be installed under the rear step of the apparatus, one (1) each side.

## **GROUND LIGHT SWITCHING**

The cab and body ground lights shall activate by engaging the parking brake.

## **REAR ROAD LIGHTING**

Two (2) sets of 4.00” LED stop, turn and back-up lights shall be provided, one (1) set on each side of the rear of the truck.

# Fouts Bros Fire Equipment

## **DOT MARKER LIGHTS AND REFLECTORS**

LED marker lights shall be installed on the vehicle in conformance to the Department of Transportation requirements. All marker lights shall be incorporated into the headlight circuit of the cab/chassis.

Two (2) amber LED side marker and turn lights shall be provided on the apparatus lower side, forward of rear axle, one (1) each side if the apparatus is 30 feet long or longer.

The side body panels shall be furnished with marker lights installed as follows:

- Two (2) 0.75" amber LED marker lights, one (1) on each side at the lower front corner of the body.
- Four (4) 0.75" red LED marker lights, one (1) on each side at the lower rear corner of the body.

The rear body panel, centered above the bumper, shall be furnished with marker lights installed as follows:

- Three (3) 0.75" red LED marker lights, as close as practical to the vertical centerline. Centers spaced not less than 6.00" or more than 12.00" apart.

Two (2) amber reflectors shall be provided on the apparatus body lower side, as far forward and low as practical, one (1) each side if the apparatus is 30 feet long or longer.

Four (4) red reflectors shall be provided on the apparatus rear, one (1) each side and two (2) on the rear.

## **LICENSE PLATE BRACKET**

There shall be a license plate bracket mounted on the rear of the apparatus. A clear LED light shall be incorporated into the bracket

## **SIDE FACING UPPER FRONT BODY SCENE LIGHTS**

One (1) pair of Whelen M92SLC EZ Series LED scene lights shall be installed. The lights shall be located on the left and right sides of the upper front portion of the apparatus body. Each light shall be supplied and installed with a chrome bezel.

## **SIDE FACING UPPER REAR BODY SCENE LIGHTS**



# Fouts Bros Fire Equipment

One (1) pair of Whelen M92SLC EZ Series LED scene lights shall be installed. The lights shall be located on the left and right sides of the upper rear portion of the apparatus body. Each light shall be supplied and installed with a chrome bezel.

## **REAR FACING UPPER BODY SCENE LIGHTS**

One (1) pair of Whelen M92SLC EZ Series LED scene lights shall be installed. The lights shall be located on the rear of the apparatus body, one (1) each side. Each light shall be supplied and installed with a chrome bezel.

## **SCENE LIGHT SWITCHING**

Three (3) rocker switches with indicators shall be provided to activate the 12-volt scene light(s). The left hand side lights, right hand side lights, and the rear lights shall each be individually switched. The switches shall be located on the cab control console.

## **DUAL FUNCTION SCENE LIGHT(S)**

The rear scene lights shall activate automatically upon placing the transmission into reverse.

## **REAR VISION SYSTEM**

One (1) complete backup camera system shall be provided to allow the driver to visually see the rear of the apparatus while in the cab. The system shall include a high resolution 7.00" touch screen with LED Backlight and anti-glare system with an auto dimmer. The system shall include audio transmission from the camera.

The rear vision camera shall be wired to automatically activate when the chassis transmission is placed in reverse.

## **CAMERA LOCATION**

The camera shall be recessed mounted in the rear of the tank, as close to the center line as possible.

The monitor for the rear vision system shall be mounted on the dash of the cab in easy view of the driver.

## **NFPA AUDIBLE AND LIGHTING WARNING PACKAGE**

The following warning light package shall include all of the minimum warning light and actuation requirements for the current revision of the NFPA 1901-2009. The lighting as specified shall meet the requirements for both "Clearing Right of Way" and "Blocking Right of Way" which includes disabling all white warning lights when the apparatus is in "Blocking Right of Way" mode.

# Fouts Bros Fire Equipment

## WARNING LIGHT FLASH PATTERN


All of the perimeter warning lights shall be set to the default NFPA flash pattern as provided by the warning light manufacturer.

## LIGHTBAR

One (1) WHELEN model JE2NFPA 56.00" LED lightbar shall be supplied and mounted. The lightbar shall have clear lenses and contain the following modules:

- Four (4) RED LIN6 LED modules, two (2) on each corner.
- Four (4) RED CON3 LED modules, across the front
- Two (2) WHITE CON3 LED modules, on the front

*Configuration*

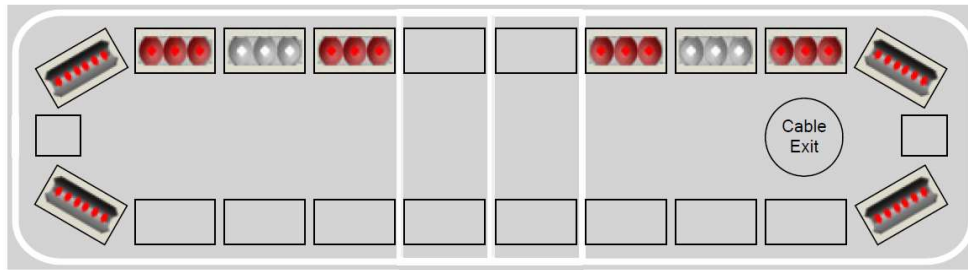

The forward facing white lights shall be automatically disabled for the "Blocking Right of Way" mode.

## LIGHT BAR SWITCHING

One (1) momentary rocker switch with indicator shall be installed on the switch panel in the cab to control the light bar. The switch shall be labeled "LIGHT BAR". The switch shall only be active when the master warning switch is engaged.

## SIDE FACING UPPER FRONT BODY WARNING LIGHTS

One (1) pair of Whelen model M9 LED warning lights shall be installed, one (1) each side of the upper front portion of the apparatus body.

The driver side warning light shall be a Whelen Model M9R red LED with red lens.

The officer side warning light shall be a Whelen Model M9R red LED with red lens.

Each light shall be mounted with a Whelen Model M9FC chrome flange.

## SIDE FACING UPPER REAR BODY WARNING LIGHTS

One (1) pair of Whelen model M9 LED warning lights shall be installed, one (1) each side of the upper rear portion of the apparatus body.

# Fouts Bros Fire Equipment

The driver side warning light shall be a Whelen Model M9R red LED with red lens.

The officer side warning light shall be a Whelen Model M9R red LED with red lens.

Each light shall be mounted with a Whelen Model M9FC chrome flange.

## **UPPER REAR WARNING LIGHTS**

One (1) pair of Whelen model M9 LED warning lights shall be installed, one (1) each side of the upper rear of the apparatus body.

The driver side warning light shall be a Whelen Model M9R red LED with red lens.

The officer side warning light shall be a Whelen Model M9R red LED with red lens.

Each light shall be mounted with a Whelen Model M9FC chrome flange.

## **UPPER WARNING LIGHT SWITCHING**

One (1) rocker switch with indicator shall be installed on the switch panel in the cab to control the upper warning lights. The switch shall be labeled "UPPER WARNING". The switch shall only be active when the master warning switch is engaged.

## **LOWER FRONT WARNING LIGHTS**

One (1) pair of Whelen model M6 Series LED warning lights shall be installed, one (1) each side one the front of the chassis cab.

The driver side warning light shall be a Whelen Model M6R red Super-LED with red lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED with red lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

## **LOWER INTERSECTION WARNING LIGHTS**

{Quantity} pair of Whelen model M6 LED warning lights shall be installed, one (1) each side of the chassis cab.

The driver side warning light shall be a Whelen Model M6R red Super-LED with red lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED with red lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

## **LOWER MID-BODY WARNING LIGHTS**

# Fouts Bros Fire Equipment

One (1) pair of Whelen model M6 Series LED warning lights shall be installed, one (1) each side of the apparatus, mid-body.

The driver side warning light shall be a Whelen Model M6R red Super-LED with red lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED with red lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

## **LOWER REAR WARNING LIGHTS**

One (1) pair of Whelen model M6 Series LED warning lights shall be installed, one (1) each side of the lower rear of the apparatus body.

The driver side warning light shall be a Whelen Model M6R red Super-LED with red lens.

The officer side warning light shall be a Whelen Model M6R red Super-LED with red lens.

Each light shall be mounted with a Whelen Model M6FC chrome flange.

## **LOWER WARNING LIGHT SWITCHING**

One (1) momentary rocker switch with indicator shall be installed on the switch panel in the cab to control the lower warning lights. The switch shall be labeled "LOWER WARNING". The switch shall only be active when the master warning switch is engaged.

## **REAR BEACONS**

Two (2) Whelen model L31 LED beacons shall be provided and installed at the upper rear corners of the apparatus.

The beacon on the driver side shall be a Whelen Model L31HRF, it shall be red in color with a red lens.

The beacon on the officer side shall be a Whelen Model L31HRF, it shall be red in color with a red lens.

## **BEACON LIGHT SWITCHING**

The beacon lights shall be controlled along with the upper level warning lights.

## **BEACON LIGHT MOUNTING**

# Fouts Bros Fire Equipment

The rear beacons shall be mounted on a stainless steel bracket and attached to the apparatus body, one (1) on each side.

## **ELECTRIC SIREN AND CONTROL**

One (1) Whelen model #295SLSA1 electronic siren shall be mounted in the cab. This unit shall feature an electronic air horn, wail, yelp, hi-lo and shall have a hard wired PA microphone.

## **ELECTRONIC SIREN SPEAKER**

One (1) Federal Signal model ES100 Dynamax 100 watt speaker shall be flush mounted as far forward and as low as possible on the front of the vehicle. A polished model ESFMT with "Electric F" grille shall be provided on the outside of the speaker to prevent road debris from entering the speaker.

The speaker shall produce a minimum sound output of 120 dB at 10 feet to meet current NFPA 1901 requirements.

The speaker shall be located on the right hand side of the bumper.

## **SIREN NOISE WARNING LABEL - FAMA# 42**

A permanent label shall be provided inside the driver's door warning of potential injury that could be received from the noise of the siren. The label shall also state safety precautions that should be taken when the siren is in use.

== PAINT/ PREP/ STRIPE/ WETSIDE TANKER, TANDEM AXLE - 7.250 03/07/23 ==

## **PAINT, STRIPING, AND LETTERING SECTION**

### **PAINT PROCESS**

The wetside tank shall be painted with a PPG Delfleet Evolution Paint System.

All products and technicians shall be certified by PPG every two (2) years.

The wetside tank shall be totally removed from the chassis during the painting process to ensure the entire unit is covered.

All seams shall be caulked both inside and along the exterior edges with a urethane automotive sealant to prevent moisture from entering.

The water tank and all parts shall be thoroughly washed with a grease cutting solvent prior to any sanding. After the wetside tank has been sanded, the wetside tank shall be washed again with a grease cutting solvent to remove any contaminants on the surface.

# Fouts Bros Fire Equipment

## **PAINT**

The tank shall be painted to match the chassis. The tank's paint color shall be "cross referenced" from the chassis paint and shall be painted to match the main chassis color as close as possible.

## **PRIMING**

Two (2) medium wet coats of adhesion promoter for plastics shall be applied to all surfaces to be painted.

Two (2) applications of primer shall be applied. The first application shall be four (4) coats and the second application shall be three (3) coats.

## **COMPARTMENT INTERIORS**

The side compartment interiors shall be unpainted and in their natural finish.

## **WHEEL RIMS**

The chassis wheels shall be as furnished by the chassis OEM. No additional finishes shall be provided by apparatus manufacturer.

## **REFLECTIVE LETTERING - PURCHASER SUPPLIED**

Reflective lettering shall be installed by the purchaser.

## **REAR CHEVRON STRIPING**

At least 50% of the rear facing vertical surface shall be covered with alternating strips of reflective striping. Each stripe shall be a minimum of 6.00" in width and shall be applied to the apparatus at 45° angle.

The chevron striping colors shall consist of 3M diamond grade 983-72NL Red and 983-23ES Fluorescent Yellow-Green.

## **FOUTS BROS. LOGO PLATE**

One (1) Fouts Bros. logo plate will be affixed to the finished apparatus.

== LOOSE EQUIPMENT - TANKER, TANDEM AXLE - 7.250 03/07/23 ==

## **LOOSE EQUIPMENT**

# Fouts Bros Fire Equipment

The following items shall be provided and shipped loose with the completed apparatus at the time of delivery:

## **FOLDING TANK**

One (1) 3,000 gallon Aluminum collapsible frame folding portable tank shall be supplied. The tank liner shall have 22 oz vinyl sides and a 28 oz vinyl floor that shall be Red in color. Grab handles shall be placed on the floor of the liner to help the firefighter pick up the liner when folding.

## **SUCTION HOSE**

Two (2) 6.00" X 10' section(s) of KOCHEK, PVC type hard, suction hose shall be provided on the apparatus. The hose(s) shall be light weight type with pyrolite, long handle female x rocker lug male, NST threads. The hose shall be black in color.

== WARRANTY- TANKER, COMMERCIAL - 7.250 03/07/23 ==

## **ONE YEAR APPARATUS WARRANTY**

The complete apparatus detailed herein shall be warranted against defects in materials and workmanship for a period of twelve (12) months, effective upon pick up or delivery of the completed apparatus to the purchaser, as detailed in the respective warranty documents. Any unauthorized alterations or modifications to the apparatus shall void this warranty.

Other warranties, as provided by individual component manufacturers may extend beyond this warranty.

## **STRUCTURAL WARRANTY, TEN YEAR**

A structural warranty shall be provided by the apparatus manufacturer for products of its manufacture to be free from defects in material and workmanship, under normal use and service, for a period of ten (10) years, effective upon final payment in full by the Purchaser, and pick up or delivery of the completed apparatus to the Purchaser. Any unauthorized alterations or modifications to the apparatus shall void this warranty.

## **PLUMBING WARRANTY, TEN YEAR**

A Stainless Steel Plumbing/Piping warranty shall be provided by the apparatus manufacturer for products of its manufacture to be free from defects in material and workmanship, under normal use and service, for a period of ten (10) years effective upon final payment in full by the Purchaser, and pick up or delivery of the completed apparatus to the Purchaser. Any unauthorized alterations or modifications to the plumbing shall void this warranty.

## **PAINT WARRANTY, FIVE YEAR**

# Fouts Bros Fire Equipment

The finish paint as used on the proposed apparatus shall be warranted against defects in materials and workmanship for a prorated period of five (5) years, effective upon final payment in full by the Purchaser, and pick up or delivery of the completed apparatus to the Purchaser. Any unauthorized alterations or modifications to the apparatus shall void this warranty.

## **TANK WARRANTY, LIFETIME**

United Plastic Fabricating, Inc. (hereinafter called "UPF") warrants each POLY-TANK®, Booster/Foam Tank POLYSIDE® Wetside Tank, Integrator Tank/Body, ELLIPSE™ Elliptical Tank, Ellip-T-Tank Tank and DEFENDER™ Skid Tank to be free from defects in material and workmanship for the service life of the original vehicle (vehicle must be actively used in an emergency response for fire suppression). All UPF Tanks must be installed and operated in accordance with the UPF Installation and Operating Guidelines.

## **APPARATUS ELECTRICAL WARRANTY, TWO YEAR**

The apparatus electrical system as detailed herein shall have an electrical warranty against defects in materials and workmanship for a period of two (2) years, effective upon final payment in full by the Purchaser, and pick up or delivery of the completed apparatus to the Purchaser. Any unauthorized alterations or modifications to the electrical system shall void this warranty.